




Labeling Service Requirements

Specifications: *Please refer to the Diagram below

- a Inner diameter (core) size must be 3".
- b Request 2,000 to 3,000 labels per roll, but the outer diameter cannot be larger than 12".
- c Web width must be between 2" to 6-1/2".
- d Labels need to have at least a 1/16" gap on all sides (between, left, & right).
- e There cannot be any perforation on the liner. If the label is die cut, the die cannot go through to the liner.
- f Label image direction must be bottom out. Refer to the diagram explanation.
- g The thickness of the label must be at least 50 lb. face stock with a 40 lb. liner.
- h All of the labels must be aligned.
- i We do not accept Clear label. Liner cannot be clear.
- j When packaging labels, please make sure the inner core is not damaged and the labels are rewound tightly.
- k Only ONE label design per roll. Front and back labels cannot be on the same roll.
- l Try to use a resealable/reusable tape to secure the labels on the roll.

IMPORTANT!! Read Before Printing your Label!

Please note we feed the bags vertically (seal side in first) into our labeling machine. Before submitting your artwork to your printer for mass production, please send us a PDF of your artwork to review. We highly recommend the label width to be at least 1/4" less than the width of the bag. When applicable, please inform us of your preferred valve location. All label application jobs are final and cannot be returned or exchanged. For more detailed information, please contact your sales representative.

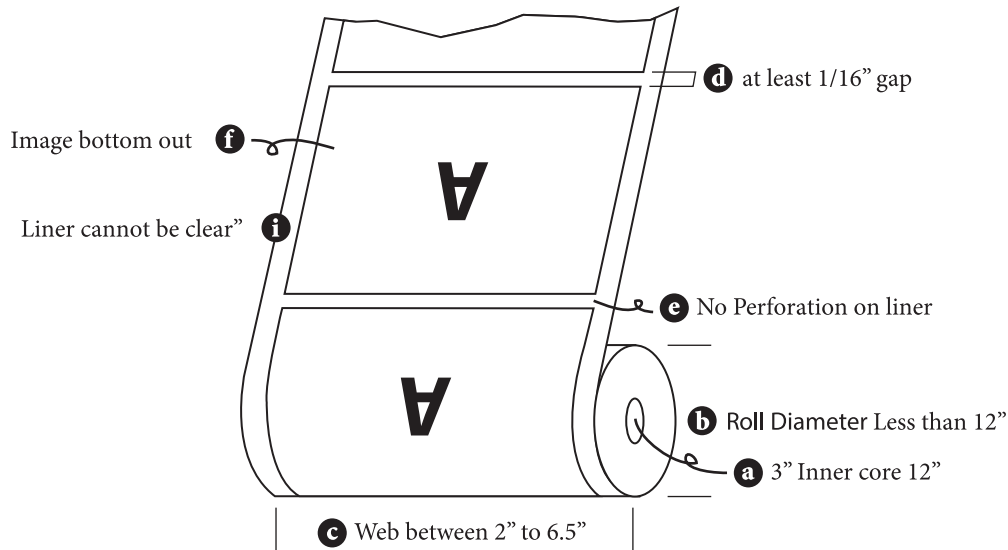

I have read and understand the label requirements above. (If you are not the Label Company, you are acknowledging that this information will be forwarded to the person in charge of printing your labels.)

Company Name: _____

Contact Person: _____

Phone: _____

Authorized Signature _____

Date: _____

Please fax this back to (909) 902-9425 to acknowledge receipt.